


ACRYLIC FLOOR SYSTEM

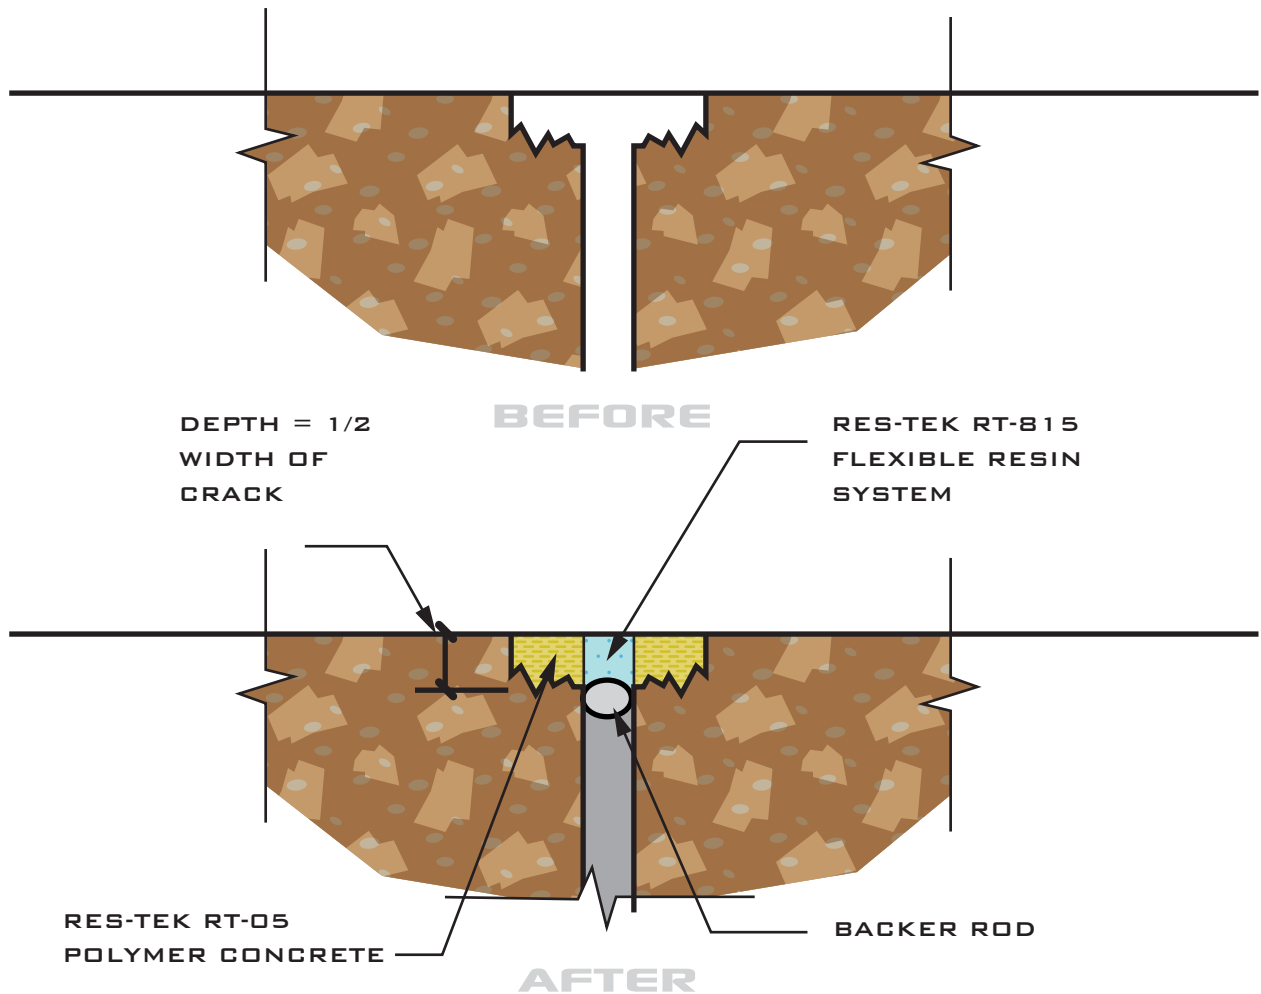

PROCESSES:

1. SAW CUT SHOULDER - DEPTH OF 1/2" TO 1"
2. REMOVAL OF DETERIORATED CONCRETE
3. PRIMING OF EXISTING CONCRETE SURFACES
4. FILL LEVEL WITH RT-05 POLYMER CONCRETE
5. RE-ESTABLISH JOINT VIA SAW CUT THROUGH POLYMER CONCRETE
6. INSTALLATION OF BACKER ROD
7. FILL JOINT WITH RT-815 FLEXIBLE RESIN SYSTEM