

Zero VOC Self-Leveling Econo Solid Color Overlay System

SYSTEM DESCRIPTION

Res-Tek XCL-Guard™ Zero VOC Self-Leveling Econo Solid Color Overlay System is a high strength, 100% solid, urethane cement based, 1/8" – 3/16" self-leveling overlay flooring system with an epoxy topcoat and RT-Sand broadcast.

SYSTEM BENEFITS

- Seamless high gloss finish that allows for a hygienic, cleanable flooring system
- Non-porous, waterproof surface
- Chemically resistant to most non-solvent based contaminants and aggressors
- Matching seamless cove base for wall protection
- Improved UV resistance
- Designed specifically to withstand heavy impact and traffic
- Minimal maintenance required
- Several standard color options

SYSTEM COMPONENTS

Primer (if required):	HD-P
Body Coat:	PUR-Guard-HD-SLE
Grout Coat:	EPO-204 pigmented
Topcoat:	EPO-204 pigmented

COLOR OPTIONS

Refer to the Res-Tek EPO-Guard Color Guide for our standard offerings.

PHYSICAL CHARACTERISTICS

Compressive Strength (ASTM C-579, psi): 5,800

Tensile Strength (ASTM C307, psi): 6,600

Modulus of Elasticity (lb./sq. in.): 19,500

Impact Resistance: No visible damage at minimum 160 in./lb.

Hardness (ASTM D-2240, Shore D): 81

Abrasion Resistance (ASTM D-4060, CS-17, mg): 135

Adhesion: Exceeds the tensile/cohesive strength of concrete

Coefficient of Friction (ASTM D 2047): Meets or exceeds ADA recommendations


Water Absorption (ASTM C-413, wt. %): <0.1

Water Vapor Transmission (DIN53122, g/cm-hr-mmHG x 10-9): 1.43

VOC Content (ASTM D-2369, Method E): PUR-Guard HD-SLE- 0 g/l
EPO-204 - 0 g/l

Cure Time: HD-SLE: 8-10 hrs. @ 70°F recoats/light traffic, EPO-204
12-20 hrs. @ 70°F recoats/light traffic

Installation Temperature Range: 60°F - 80°F

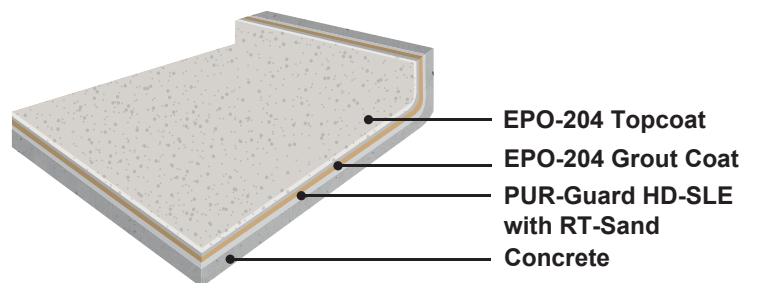

PRIMING

If concrete out-gassing occurs resulting in surface irregularities, the substrate should be primed with PUR-Guard single component primer. The primed area should be allowed to dry tack free before proceeding with the HD-SLE application. Installation of a test patch may be helpful to determine if priming is necessary.

SLIP RESISTANCE

Aluminum oxide or industrial silica can be added to the system to increase slip-resistance to the desired level. Please consult your Res-Tek representative for more information.

COVE BASE

All Res-Tek floor systems can include an integral 4" or 6" cove base.

FLEXIBLE MEMBRANES

Flexible membranes are available if required. Please consult your Res-Tek representative to select specific options based on your needs.

MOISTURE MITIGATION

Additional products are required if waterproofing or moisture mitigation is needed. Please consult your Res-Tek representative for more information.

CLEANING & MAINTENANCE

Res-Tek flooring systems require little routine maintenance. No stripping or waxing is required. However, a regular cleaning schedule will increase service life and aid in maintaining aesthetics. Please refer to the Cleaning & Maintenance Guide for specific instructions.



MIXING & APPLICATION

Please refer to the Product Data Sheets and Application Guide for specific instructions.

PACKAGING

Products are sold by weight, not by volume. Product properties require that containers provided are not completely filled. See price sheet for actual container weights and volumes.

STORAGE CONDITIONS

Store material in a cool and dry place out of direct sunlight. Do not store near open flame or ignition source. Read and understand all product labels and SDS sheets prior to use.

WARRANTY

Res-Tek Inc. warrants material for 1 year if used and stored in accordance with Res-Tek's specified application procedure. Res-Tek Inc. has no responsibility for application and processing of products. Joint issued warranties are available by request when a Res-Tek approved applicator is selected for installation.

