

Flexible Solid Color Overlay System

SYSTEM DESCRIPTION

Res-Tek EPO-Guard™ Flexible Broadcast Solid Color Overlay System is a high strength, high elongation, zero VOC, 110 - 130 mil, multi-layer epoxy flooring system with RT-Sand broadcast.

SYSTEM BENEFITS

- High elongation
- Seamless surface that allows for a hygienic, easy-to-clean flooring solution
- Non-porous, waterproof surface
- Integral cove base can be formed
- Improved UV resistance
- Chemical resistant
- Abrasion resistant

SYSTEM COMPONENTS

Primer:	EPO-260
Body Coat:	EPO-260 pigmented
Grout Coat:	EPO-204 pigmented
Topcoat:	EPO-204 pigmented
Alt. Topcoats	EPO-205 pigmented ISO-101 Polyaspartic pigmented ISO-103 High Traffic Urethane pigmented

COLOR OPTIONS

Please refer to the Res-Tek EPO-Guard Color Guide for our standard offerings.

PHYSICAL CHARACTERISTICS

Compressive Strength (ASTM C-579, psi): 8,000

Tensile Strength (ASTM C307, psi): 6,600

Tensile Elongation at Break (ASTM C307, psi): 169%

Hardness (ASTM D-2240, Shore D): 81

Abrasion Resistance (ASTM D-4060, CS-17, mg): 135

Adhesion: Exceeds the tensile/cohesive strength of concrete

Coefficient of Friction (ASTM D 2047): Meets or exceeds ADA recommendations when a slip-resistant broadcast is added


VOC Content (ASTM D-2369, Method E):

EPO-204 - 0 g/l

EPO-260 - 0 g/l

Cure Time: Foot traffic 12hrs., full service 7 days

Installation Temperature Range: 60°F - 80°F

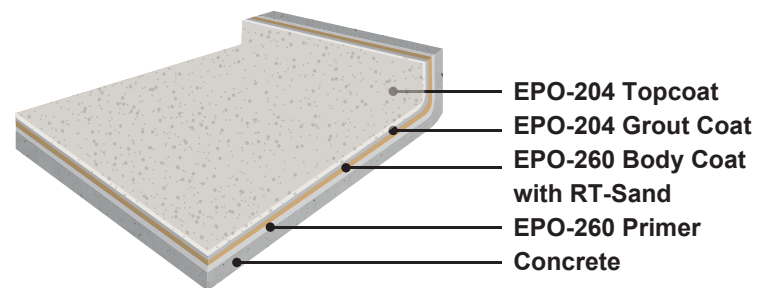

SLIP RESISTANCE

The industrial silica in this system makes it inherently slip-resistant. Depending on the environment, different sizes and rates can be added to the system to increase slip-resistance to the desired level. Please consult your Res-Tek representative for more information.

COVE BASE

All Res-Tek floor systems can include an integral 4" or 6" cove base.

FLEXIBLE MEMBRANES

Flexible membranes are available if required. Please consult your Res-Tek representative to select specific options based on your needs.

MOISTURE MITIGATION

Additional products are required if waterproofing or moisture mitigation is needed. Please consult your Res-Tek representative for more information.

CLEANING & MAINTENANCE

Res-Tek EPO-Guard floors require little routine maintenance. No stripping or waxing is required. However, a regular cleaning schedule will increase service life and aid in maintaining aesthetics. Please refer to the EPO-Guard Cleaning & Maintenance Guide for specific instructions.

MIXING & APPLICATION

Please refer to the Product Data Sheets and Application Guide for specific instructions.



PACKAGING

Products are sold by weight, not by volume. Product properties require that containers provided are not completely filled. See price sheet for actual container weights and volumes.

STORAGE CONDITIONS

Store material in a cool and dry place out of direct sunlight. Do not store near open flame or ignition source. Read and understand all product labels and SDS sheets prior to use.

WARRANTY

Res-Tek Inc. warrants material for 1 year if used and stored in accordance with Res-Tek's specified application procedure. Res-Tek Inc. has no responsibility for application and processing of products. Joint issued warranties are available by request when a Res-Tek approved applicator is selected for installation.